



425-6175
'11+ Charger
CC/CD Console

Installation Instructions



Remove forward OEM console plastic cover to expose OEM mounting points for aluminum floorplate. Remove (2) 10mm flange nuts. Nuts will be re-used.



Remove (2) 8mm mounting screws at the rear mounting point of the aluminum floorplate. Screws will be re-used. This will allow the removal of the OEM aluminum floorplate and brackets.



This will expose the plastic OEM console. Remove (1) 10 mm flange nut from center of plastic console. Nut will be re-used.



With both hands, grasp the plastic OEM console on both sides and pull directly rearward to release.



Disconnect wiring harness for 12V and USB from OEM console.



At this point – you need to remove the OEM Climate Control Cluster. At the bottom left and right edge, pull away from the dash and it will unsnap from the OEM dash structure. Disconnect cable from rear of CC cluster. Set aside for later use.

SKIP - for 2015+ Chargers



Charger 2011-2014: Remove OEM radio for relocation.

SKIP - for 2015+ Chargers



Charger 2011-2014: Attach the left and right radio brackets (brackets are stamped left/right) to dash in same location radio was removed from.

SKIP - for 2015+ Chargers




Charger 2011-2014: Re-install radio to radio brackets using (4) 10-32 screws. The cross brace attaches with the two upper screws.



Outside of vehicle install climate control into Jotto Desk Contour Console and then connect cables back into module. Making sure that climate control sets into radio. When done correctly there will be no gap at top of console.



SKIP - for 2015+ Chargers
Charger 2011-2014: Line up hole on P/S of console with radio relocation bracket, secure using provided 10-32 socket head cap screw.

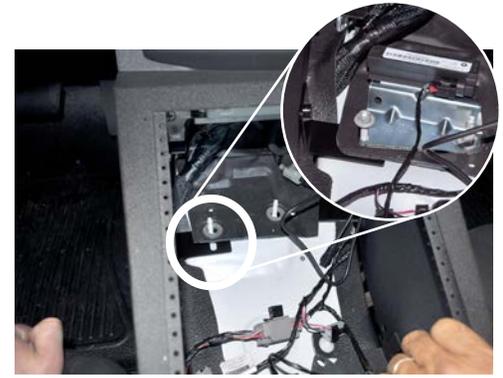

Remove 10mm OEM nuts from studs near proximity sensor. Pull up rubber pad placing front mounting brackets (x2) under pad. Replace rubber pad and proximity sensor and secure using OEM nuts.



Secure front mounting bracket to D/S of console using provided 10-32 socket head cap screw. Repeat for other side.



Utilize OEM flange nuts to finish the installation of Jotto Desk Contour Console, securing onto OEM mounting studs. This will snug up the console to the OEM dash.



Secure Accessory Adaptor Plate to the front/face of Climate Control Console using provided hardware and to the rear mounting points using the OEM 8 mm screws.



Accessory Adaptor Plate houses the OEM 12v outlets and USB connector. Utilize the provided USB extension cable. Plug the male end into the harness under the dash and the female end into the USB connector. Re-mount 12v outlets and USB connector into Accessory Adaptor Plate

If you have questions or need further assistance please call Technical Support: 1.877.455.6886



209 W. EASY ST., ROGERS, AR 72756 • www.EVERYTHINGBUTLIGHTS.com • 2/15

Jotto Desk® is a patented product and Registered Trademark of Assembled Products™ Corporation. Contour Console™ has design and utility patents. Additional Patents Pending. Specifications subject to change without notice.