
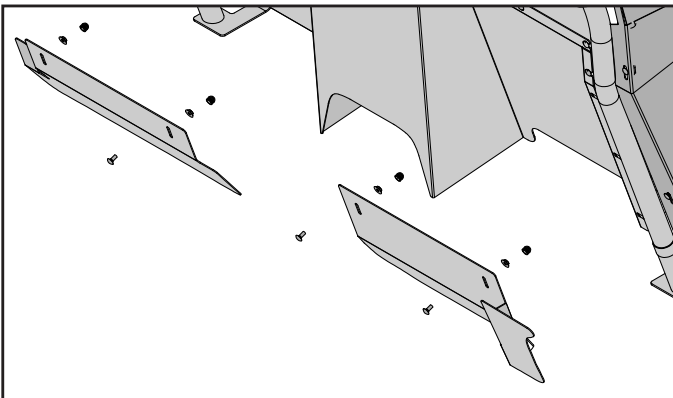


1 PIECE HSEP VP1 THROUGH VP8

1. Place High Security Extension Panel (HSEP) against the prisoner side of the partition, with bottom edge resting on the floor of the vehicle. If you have a formed HSEP, formed tabs on each side of hump cutout should angle forward under the front seats. Clamp HSEP in position to drill holes properly.
2. Drill through HSEP mounting holes into partition with a 1/4" drill bit. Use caution as the seats are behind the partition.
3. Attach with thread cutter bolts to partition prisoner side.

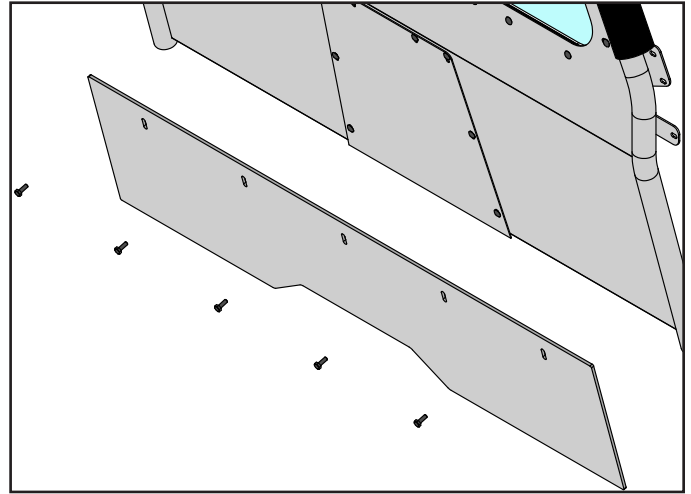

2 PIECE HSEP VP1 THROUGH VP8

1. Place High Security Extension Panel (HSEP) against the prisoner side of the partition, with bottom edge resting on the floor of the vehicle. If you have a formed HSEP, formed tabs on each side of hump cutout should angle forward under the front seats. Clamp HSEP in position to drill holes properly.
2. Drill through HSEP mounting holes into partition with a 5/16" drill bit. Use caution as the seats are behind the partition.
3. Attach to partition with carriage bolts, nuts and caps from prisoner side.

3 PIECE HSEP VP9

1. Place High Security Extension Panel (HSEP) against the prisoner side of the partition, with bottom edge resting on the floor of the vehicle. If you have a formed HSEP, formed tabs on each side of hump cutout should angle forward under the front seats. .
2. Attach to partition with carriage bolts, nuts and caps from prisoner side.

